

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT: Arash Rouhi **GROUP:** UNKNOWN
SERIAL NO: 10/720,642 **EXAMINER:** UNKNOWN
FILED: 11/24/2003
FOR: A MULTIMEDIA NETWORK

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country: Sweden
Appln No.: 0300126-0
Filing Date: 01/17/2003

Respectfully submitted,

Matthew E. Connors
Registration No. 33,298
Samuels, Gauthier & Stevens
225 Franklin Street
Boston, Massachusetts 02110
Telephone: (617) 426-9180
Extension: 112

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to the: Commissioner of Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Emily C. Porell

12/29/2003
Date

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Arash Rouhi, Göteborg
Applicant (s)

(21) Patentansökningsnummer 0300126-0
Patent application number

(86) Ingivningsdatum 2003-01-17
Date of filing

Stockholm, 2003-12-03

För Patent- och registreringsverket
For the Patent- and Registration Office


Hjordis Segerlund

Avgift
Fee 170:-

Ink. t. Patent- och reg.verkst

2003-01-17

Muvudtjänsten Kaseen

1

P16624SEA01, BA, 2003-01-17

A MULTIMEDIA NETWORK

5 FIELD OF INVENTION

The present invention relates to digital networks, and more particularly, to digital networks for home or office use, which provide interconnectivity to products within the home or the office.

10 BACKGROUND OF THE INVENTION

A typical home network today is data-based and computer-centered (usually personal computer), and emphasizes sharing printers and Internet access within a house. While functional, it is of limited interest to the typical consumer. Audio and video seem to be the most likely candidates to draw the average consumer into

home networking. A recent survey conducted by the Consumer Electronics Association found that 61% of respondents liked the idea of being able to watch cable or satellite TV on any television in the home. 59 % of consumers surveyed favored listening to music in any part of the house.

20 The products at home consist very often of two or several devices, which communicate with each other thorough application-specific cables. For example a HiFi sends audio signals to loudspeakers through wires, a CD player sends audio signals to HiFi/active loudspeakers through composite audio cables, VCR sends audio and video signals through either SCART, composite audio/video or S-video

25 cables to a TV-set, a video projector or another VCR. Additional examples could be the communication between a PC-tower and its peripherals such as cable modem, printer, mouse, keyboard, monitor or a data projector. In all the communication examples above, a source and a destination device may be identified. For example, the VCR is a source device and the TV-set is a destination device. It is quite often

30 desired by the typical customer to be able to capture the signals from a source device in several destination devices, e.g. being able to connect a VCR to other VCRs and TV-sets in different rooms in home. It is also desired to be able to place or move these devices anywhere at home without needing to extend or re-install the connecting cables. A wireless network might achieve these desires. However

35 these networks are quite expensive for a typical customer today and still struggle with security issues, which in this case decrease the bandwidth of the network. Even from the environment point of view the wireless solutions are not preferred due to their electromagnetic radiation.

Ink t. Patent- och reg.verkst

7003 -01- 17

Huvudfaxen Kaseen

2

- US 5,539,390 discloses a method for setting addresses in a system including a controller for controlling transmission and reception of information signals, and a connection apparatus for connection to a succeeding connection apparatus for transmission and reception of the information signals between the controller and the succeeding connection apparatus. The method includes the steps of supplying a first address setting signal from the controller to the connection apparatus, processing the first address setting signal in a predetermined manner in the connection apparatus to generate a second address setting signal, and providing the second address setting signal selectively to one of the controller and the succeeding connection apparatus. In another class of embodiments, the invention is a method for setting addresses for controlled apparatuses connected in series with a controller, including the steps of supplying an address setting signal from the controller to a first controlled apparatus, processing the address setting signal in the first controlled apparatus to generate a second address setting signal, processing the second address setting signal in a second controlled apparatus to generate a third address setting signal, and feeding back the third address setting signal to the controller through a signal line.
- According to US 6,005,861, a home network architecture has an internal digital network interconnecting devices in the home. Entertainment services are introduced into the network through network interface units that are coupled to an external network and to the internal network. The network interface units perform the necessary interfacing between the external and internal networks, and make the entertainment services available to all terminals connected to the internal network. A plurality of set-top electronics that do not have network interface units connect to the internal network and prepare the information in the digital data stream for display, by a television, for example.
- US 6,480,889 discloses a scheme for managing the nodes connected to a home network according to their physical location. A communication device constituting each node is formed by at least one communication unit for carrying out communication through a connected network, having communication ports for connecting nodes through which data are to be exchanged by the nodes, and a configuration information regarding a configuration of a communication device having a region for dynamically describing information regarding a location information regarding a physical location of the communication device. The

Information outlets or access points according to this invention are only provided to
localize different IEEE 1394 enabled devices connected in an IEEE 1394 network.
The access point is a node like all other nodes and includes information about the
place it is installed in. These additional nodes are provided only for purpose of
5 definition of where devices like TV, PC or VCR are.

MOST is a synchronous network. A timing master supplies a clock and all other
devices synchronize their operation to this clock. This technology eliminates the
need for buffering and sample rate conversion so that very simple and inexpensive
10 devices can be connected. The technology is similar to what the public switched
telephone network uses. There are data channels and control channels defined. The
control channels are used to set up what data channels the sender and receiver are
to use. Once the connection is established, data can flow continuously and no
further processing of packet information is required. This is the optimum
15 mechanism for delivering streaming data (information that flows continuously).

Computer based data, such as Internet traffic or information from a navigation
system, is typically sent in short bursts and is often going to many different places.
MOST has defined efficient mechanisms for sending asynchronous, packet based
20 data.

The control channel permits devices to send control messages while the data
channels are in use so all devices can cleanly start up and shut down the data they
are using.

25 Just as important as the hardware, system software and application programming
interfaces (API's) are crucial to insure that devices from different manufacturers
can interact with each other. The API's need to be object oriented so applications
can concentrate on the functions they provide. They need to be able to control all
30 the features that devices provide on the network, whether from A/V equipment,
GPS navigation systems, telephones or telematics systems. The MOST Specification
encompasses both the hardware and the software required to implement a
multimedia network. MOST defines all seven layers of the OSI reference model so
that designers developing applications can concentrate on the functions that affect
35 the end user rather than the complexities of the underlying network. All MOST
devices have been designed using this API so compatibility is assured.

Int. t. Patent- och reg.verket

2003-01-17

4

Huvudförfattaren Kessan

SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above-described problems and needs. The main purpose of this invention is to meet all these desires and more by providing interconnectivity to electrical products in general and home products in particular, such as phones, HIFIs, VCRs, TV-sets and PCs through a relatively inexpensive digital network, for example based on a MOSTnet.

The distribution of control procedure of the network into the access points and gateways removes the need of a separate control unit, hence reducing the costs and the complexity of the home network. The physical interface between all access points and all kind of gateways are identical, hence making use of the home network very flexible. The use of an open network, such as MOSTnet, in certain preferred embodiments also makes the network relatively low cost, as plastic fiber cables may be installed at low cost in a home.

15

For these reasons, there is provided a multimedia network system for inter-connecting a number of receiving and transmitting digital and/or analogous devices, the network system comprising: a number of receiving and/or transmitting terminals to be connected to said digital and/or analogous devices, application specific connector arrangements connectable to each of said terminals for connecting said digital and/or analogous devices to said terminals, and at least one of said connector arrangements being arranged to transmit and/or receive a data, said at least one connector arrangement containing data at least on required bandwidth, identification and receiving/transmitting device data format.

25

BRIEF DESCRIPTION OF THE DRAWINGS

In the following, the invention is described in connection with an exemplary embodiment illustrated in the attached figures, in which:

- 30 FIG. 1 is a network constructed in accordance with an exemplary embodiment of the present invention.
- FIG. 2 is a schematic depiction of access points and gateways constructed in accordance with the exemplary embodiment of the present invention.
- FIG. 3 is a logical block diagram showing some examples over the signal flow from a transmitter to a receiver via the exemplary embodiment of the present invention.
- 35 FIG. 4 is a schematic diagram showing the arrangement of group address in the transceivers used in the exemplary embodiment of the present invention.

FIG. 5 shows an example where several similar transmitters (VCRs) are simultaneously transmitting to several similar receivers (TV) via the exemplary embodiment of the present invention.

5 FIG. 6 shows an exemplary embodiment of the front end of an access point used in the exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following, the invention is described in conjunction with an exemplary embodiment relating to a house and based on MOSTnet technology. However, it
10 should be clear that the application site can be any space with need for a multimedia network connection and the invention can use other technologies. Multimedia network according to this invention defines a network, which can receive and transmit different types of signals in digital form over a transmission media, such as a cable, wire or radio or combination of these. FIG 1 shows a home
15 configuration in which the present invention may be practiced. As shown in the figure, there are four rooms 101, 102, 103 and 104, each having electronic devices that are coupled to the home multimedia network 100. The network 100 comprises arbitrarily number of similar Access Points (APs), which are installed as wall sockets and connected to each other in a serial fashion. It is of course possible to use other
20 terminal types than sockets. To access the network, each device can be coupled to any unused AP in network 100 through an application-specific gateway, e.g., 01Tx or 01Rx in FIG 1 (Tx= Transmitter, Rx= Receiver). As soon as a transmitter/receiver is connected to the network, it is detected and in case an appropriate receiver/transmitter is already connected to the network, a
25 communication link between the devices is established.

With reference to FIG. 1 the network comprises a PC tower 105, a VCR 106, a TV-set 107, a pair of active loudspeakers 108L and 108R and a telephone 109 in a room 101, a DVD-player 110, a CD-player 111, a telephone 112, a pair of active
30 loudspeakers 113L and 113R and a VCR 114 in another room 102, a wall-outlet (phone jack) 115, a telephone 116, a data/video projector 117, and a pair of passive loudspeakers 119L and 119R which are connected to a HiFi-set 118 in a third room 103, a PC monitor 120, a PC keyboard 121, a PC mouse 122, a printer 123, a telephone 124, a TV-set 125, and a pair of active loudspeakers 126L and
35 126R in a fourth room 104. Of course, other devices not mentioned here but suitable for use in the network of the invention can also be connected.

Ink. t. Patent- och reg.verkst

2003 -01- 17

6

Huvudföresen Kaseon

In the home configuration shown in FIG. 1 the following placements and simultaneous connections are made via the network 100:

- 5 1. Placement of HiFi-set 118 in room 103 and connection of its composite audio output to composite audio inputs of the active loudspeaker-pairs 108L/R in room 101 and 113L/R in room 102. HiFi-set 118 is coupled to the network by connecting its composite audio output via a 01Tx gateway to an access point in room 118. Similarly the composite audio inputs of the active loudspeaker-pairs 108L/R and 113L/R are coupled to the network via two 01Rx gateways to two access points in rooms 101 respective 102.
- 10 2. Placement of CD-player 111 in room 102 and connection of its composite audio output to a composite audio input of HiFi-set 118 in room 103 and the active loudspeaker-pairs 126L/R in room 104. CD-player 111 is coupled to the network by connecting its composite audio output via a 02Tx gateway to an access point in room 102. Similarly a composite audio input of HiFi-set 118 and the active
15 loudspeaker-pairs 126L/R are connected via two 02Rx gateways to two access points in room 103 respective room 104.
- 20 3. Placement of VCR 114 in room 102 and connection of its composite video and audio outputs to composite video and audio inputs of VCR 106 in room 101, TV-set 125 in room 104 and data/video projector 117 in room 103. VCR 114 is coupled to the network by connecting its composite video and audio outputs via a gateway 03Tx to an access point in room 102. Composite video and audio inputs of VCR 106 are connected via a 03Rx gateway to an access point in room 101. Composite video and audio inputs of TV-set 125 are connected via a 03Rx gateway to an access point in room 104. Composite video and audio inputs of
25 data/video projector 117 are connected via a 03Rx gateway to two access points in room 103.
- 30 4. Placement of DVD-player 110 in room 102 and connection of its S-video output to the S-video inputs of VCR 106 in room 101, TV-set 125 in room 104 and data/video projector 117 in room 103. DVD-player 110 is coupled to the network by connecting its S-video output via a 05Tx gateway to an access point in room 102. The S-video input of TV-set 125 is connected via a 05Rx gateway to an access point in room 104. The S-video input of the data/video projector 117 is connected via a 05Rx gateway to an access point in room 103.
- 35 5. Placement of PC tower 105 in room 101 and connection of its RGB output to the RGB inputs of PC monitor 120 in room 104 and data/video projector 117 in room 103. Further one of USB outputs of PC tower 105 is connected to USB input of printer 123 in room 104. The RGB output of PC tower 105 is connected

via a 06Tx gateway to an access point in room 101. One of USB outputs of PC tower 105 is connected via a 07Tx gateway to an access point in room 101. The RGB inputs of monitor 120 and data/video projector 117 are connected via two 06Rx gateways to two access points in rooms 104 respective 103.

- 5 6. Placement of PC keyboard 121 in room 104 and connection of its output to the keyboard input of the PC tower 105 in room 101. The output of keyboard 121 is connected via a 08Tx to an access point in room 104. The keyboard input of PC tower 105 is connected via a 08Rx gateway to an access point in room 101.
- 10 7. Placement of PC mouse 122 in room 104 and connection of its output to the mouse input of the PC tower 105 in room 101. The output of mouse 122 is connected via a 09Tx gateway to an access point in room 104. The mouse input of PC tower 105 is connected via a 09Rx gateway to an access point in room 101.
- 15 8. Connection of the phone jack 115 in room 103 to telephones 109 in room 101, 112 in room 102, 116 in room 103 and 124 in room 104. Phone jack 115 is connected via a 10Tx gateway to an access point in room 103. Telephones 109, 112, 116 and 124 are connected via four 10Rx gateways to four access points in rooms 101, 102, 103 respective 104.

- 20 The network 100 in FIG 1 includes arbitrarily number of identical or very similar access points (AP). These access points, which might be installed as wall sockets, are connected to each other in a serial fashion as mentioned above. To access the network, each device can be connected to any unused access point in the network through a specific gateway. All gateways in FIG 1 have two interfaces: an identical
- 25 interface to any access point in the network and an application-specific interface. Some examples on applications are different standards of composite audio, different standards of composite video (e.g. PAL B, PAL D, NTSC), S-video, RGB, USB, Ethernet, etc. Additionally, gateways in FIG 1 may be divided into two categories: transmitters (Tx) and receivers (Rx). A Tx gateway is used for
- 30 connection of a transmitter, e.g. VCR 114 in FIG 1, to the network. An Rx gateway in the other hand is used for connection of a receiver, e.g. TV 125 in FIG 1, to the network. To connect a transmitter to one or more receivers, e.g. a PAL B VCR to several PAL B TV-sets, one Tx gateway (e.g. PAL B Tx gateway) and one or several Rx gateways of the same kind (e.g. PAL B Rx gateways) are used. This means that
- 35 each transmitter in the network presented in FIG 1 can be connected to as many receivers as the number of the currently unused access points in the network allows. As it can be seen in the figure, there are no specific (central) control units

Ink. t. Patent- och reg.verket

2003-01-17

8


Murudföreläsningen

Included in the present invention. The control logic is instead distributed into all access points and coupled gateways. This is one of the unique characteristics in the present invention, which make it less complex and more cost effective to the average consumer.

5

The present invention may be implemented using any open standard, which supports network solutions based on the ring-topology, e.g. MOSTnet or IEEE1394. However, in a preferred implementation, as described in this application, the open standard MOSTnet is used (as described earlier). FIG. 2 shows an exemplary
10 Implementation of the access points and gateways in the present invention based on MOSTnet. The network transceiver 213 in each access point may be implemented using the commercially available chip, MOST network transceiver OS8104, manufactured by OASIS Silicon Systems. The core network management
15 functions in a MOST network are handled automatically, on a distributed basis, and are embedded into the OS8104 MOST transceiver itself. Since channel allocation, physical addressing, fault monitoring and power-down/wake-up are provided on-chip, the implementation of the network is very simple and a high level of network protection and reliability is achieved. Remote access allows for network management functions, such as network diagnostics, to be handled in a
20 decentralized manner within each node.

Thus, the network 100 comprises arbitrarily numbers of access points, whereas access points 201, 202, 203, 204, 205 and 206 are shown in FIG. 2. As shown in the figure, the transceivers in all access points are connected to each other in a
25 serial fashion and build up the network 100, which is the multimedia and control network based on ring topology, where all relevant network management functions such as bandwidth allocation and de-allocation are handled internally in a distributed manner. The Control Ports (CP) of transceivers in network 100 might be configured in either serial or parallel mode; in the present invention however in this
30 exemplary implementation the control port of all transceivers in network 100 are configured in serial mode (I2C). The source ports (SP) of the transceivers might also be configured in either serial or parallel mode. However, to minimize the number of interfacing signals between an access point and a gateway a serial mode is preferred. Beside the network transceiver 213, each access point in network 100
35 comprises a micro-controller 214, which is connected to the control port of the transceiver 213 via I2C bus 216. The micro-controller also controls a user-indicator 215, which is placed on front end of each access point and is used for indication of



Ink. t. Patent- och reg.verkst

7009 -01- 17

9

Huvudföretagen Kaseon

network and connection status to the user. The user-indicator 215 might be implemented using a simple light bar, LEDs or a display.

- As shown in FIG. 2, the transmitter 210 is coupled via Tx gateway 207 to access point 201 and via network 100 broadcasts digital or analog signals to receivers 211 and 212, which are coupled to access points 202 respective 203 via two Rx gateways 208. Before being inserted to the network, the output from transmitter 210 needs to be adapted into a digital format, which is supported by the source port of the network transceiver 213 in access point 201. As shown in the figure this adaptation is done in TX adaptation 217, which is in one side connected to the output of the transmitter and in other side to the source port of the network transceiver in the access point. When inserted into the network this adapted data might be captured in any access point in network 100 using an appropriate Rx gateway where it is adapted back into the original format and delivered to the receiver. In the figure, the adapted data stream from transmitter 210 is captured in access points 202 and 203 where it is adapted back in Rx adaptation 220 in Rx gateways 208 and delivered to receivers 211 respective 212. Tx and Rx adaptation in the gateways are exemplified in FIG. 3, which shows a logical block diagram where VCR 301 and PC (graphic card) 302 are simultaneously transmitting analog composite video/audio and digital RGB data to TV 303 and PC monitor 304, respectively, via the network 100. As shown in the figure, the analog composite video/audio signals coming from VCR 301 are first converted into a digital format in ADC 306 in Tx gateway 305 and then compressed and encoded (in 307) using e.g. MPEG2 algorithm, to reduce the required bandwidth. In the receiving side, Rx gateway 309 captures this compressed video/audio data from network 100 and de-compresses and decodes (311) it into composite video/audio data, which is then converted into analog composite video/audio in DAC 310 and delivered to TV 303. Since the output from the graphic card 302 is already digital, no analog/digital conversion step is necessary in TX gateway 305. To reduce the required bandwidth, the RGB data is however compressed and encoded (308), using e.g. JPEG algorithm, before insertion into the network. In the receiving side, Rx gateway 312 captures this compressed graphic data from network 100 and de-compresses and decodes it back into RGB data and delivers it to PC monitor 304.
- Beside the adaptation part, each gateway in FIG. 2, whether Tx or RX, comprises a micro-controller and a DIP-switch. When coupled to an access point, the micro-controller in each gateway is provided access to the transceiver in the access point

- via bus 216. Preferably, the DIP-switch 219 in Tx gateway and DIP-switches 222 in RX gateways 208 are placed on the front end of each gateway and can be configured by the user. Tx gateway 207 and Rx gateways 208 build up a gateway group. For each data stream set up through network 100 a gateway group, which
- 5 consist of one Tx gateway and one or several similar Rx gateways, is needed. All DIP-switches in a gateway group must be configured equally hence outputting the same bit pattern to micro-controllers in gateways where they are combined with a pre-define bit pattern to generate a unique group address for the gateway group. This group address is used for setup of data stream via the network 100 from a
- 10 coupled Tx gateway to: all coupled Rx gateways, which belong to the same gateway group as the Tx gateway. The pre-defined part in the group address is a constant value embedded in the applications running in the micro-controllers in both Tx and Rx gateways in the gateway group and is related to their related standard such as composite video PAL E or USB and is a unique pattern for each supported standard.
- 15 As mentioned above the MOST network transceiver chip, OS8104 might be used to implement transceiver 213 in access points. OS8104 supports 255 group addresses, which means that theoretically 255 transmitters can be coupled simultaneously to the network 100. The arrangement of the supported 16-bit group addresses in OS8104 is shown in FIG. 4. As shown in the figure, the 8-bit variable
- 20 part in the group address may be portioned as appropriate into user-define and pre-defined parts. However, it is recommended to keep the width of the user-define pattern as low as possible as the higher width will make the usage of the present invention more complex to the typical user. Allowing the user to partly define the group address makes it possible to connect several transmitters and receivers of
- 25 the same character, e.g. several VCRs and TVs, simultaneously to the network 100 and group them as desired. The maximum number of coupled similar transmitters depends on the width of the DIP-switches in gateways. This is exemplified in FIG. 5, where VCR 1, VCR 2, VCR 3, VCR 4 and CD-player 1 are simultaneously
- transmitting composite audio/video signals of same standard, e.g. PAL B;
- 30 corresponding composite audio via network 100 to TV 1 and TV 2, TV 3, TV 4, TV 5 and HiFi 1, respectively. In this example, all gateways are implemented using 2-bit DIP-switches hence a maximum of 4 similar transmitters might simultaneously use network 100 for data transmission.
- 35 Five gateway groups can be identified as in FIG. 5:
1. Tx gateway 501 and Rx gateways 502 and 503 (Composite audio/video)
 2. Tx gateway 504 and Rx gateway 505 (Composite audio/video)

3. Tx gateway 506 and Rx gateway 507 (Composite audio/video)
4. Tx gateway 508 and Rx gateway 509 (Composite audio/video)
5. Tx gateway 510 and Rx gateway 511 (Composite audio).

- 5 Tx gateways 501, 504, 506 and 508 are all similar and the only difference between them is the value of their DIP-switches. Also Rx gateways 502, 503, 505, 507 and 509 in FIG. 5 are similar. As it can be seen in the figure, several similar coupled Rx gateways such as Rx gateways 502 and 503 might have the same DIP-switch value. This is however not valid when it comes to similar TX gateways. Two similar
10 TX gateways, which are simultaneously are coupled to network 100, shall not have equal DIP-switch values.

Referring back to FIG. 2, three states might be identified for each access points in network 100 depending on how transceiver 213 is configured:

15 1. *Default state.*

In this state no gateway is connected to the access point. The access point enters into this state when transceiver 213 is initialized by micro-controller 214 either at power-up or when a gateway is disconnected from the access point. During this state transceiver 213 is accessed either remotely by network 100 or
20 locally by micro-controller 214. Network 100 continuously updates transceiver 213 with the current network status and micro-controller 214 periodically reads the network status, such as available bandwidth, from transceiver 213 and indicates it to the user by configuring user-indicator 215. Access points 204, 205 and 206 in FIG. 2 are in the default state.

25 2. *Receiving state.*

In this state an Rx gateway is coupled to the access point. Access points 202 and 203 in FIG. 2 are in the receiving mode. They were entered into this mode when Rx gateways 208 were coupled to them. During this state, the transceiver
30 213 in the receiving access point is accessed either remotely by network 100 or locally either by micro-controller 214 in the access point or by micro-controller 221 in the coupled Rx gateway. The micro-controller 221 in the coupled Rx gateway asserts the interrupt signal 223 to micro-controller 214 in the access point when it requires access to transceiver 213. Initially micro-controller 221 in
35 the coupled Rx gateway configures related parts in transceiver 213 such as source data ports as appropriate and assigns the group address of the gateway group to it. If the user reconfigures DIP-switch 222 on the RX gateway while it

is coupled to the receiving access point, the group address in transceiver 213 in the access point is also updated by micro-controller 221 in the RX gateway. While micro-controller 221 in the RX gateway does not require access to transceiver 213, micro-controller 214 in the receiving access point periodically
5 reads the network and connection status from transceiver 213 and indicates it to the user by configuring user-indicator 215.

3. *Transmitting state.*

In this state a Tx gateway is coupled to the access point. Access point 201 in
10 FIG. 2 is in the transmitting state. The access point enters into this state when a Tx gateway is coupled to it. During this state transceiver 213 in the transmitting access point is accessed either remotely by the network 100 or locally either by the micro-controller 214 in the access point or by micro-controller 218 in the Tx gateway. The micro-controller 218 in the Tx gateway asserts the interrupt signal
15 223 to micro-controller 214 in the access point when it requires access to the transceiver 213. Initially the micro-controller 218 configures related parts in the transceiver 213 such as source data ports as appropriate. The micro-controller 218 in the Tx gateway then configures the transceiver 213 to send an allocation request of a number of network channels, which are required for transport of
20 the adapted source data from the transmitter in the network. This step is repeated until either the network 100 allocates the requested channels for the transmitter or the user disconnects the Tx gateway from the access point. If network 100 grants the requested channel allocation, the adapted source data from the transmitter is dropped into the allocated channels in the network 100
25 by the transceiver 213 and is available in any unused access point in the network. Micro-controller 218 in the Tx gateway then periodically (e.g. each 1 second) configures the transceiver 213 to group cast similar control messages. These control messages are addressed to transceivers 213 in all access points in the network 100 to which an Rx gateway belonging to the same gateway group as the Tx gateway is coupled. These destination transceivers all have the group
30 address of the gateway group and are configured by the control messages to drop out data from the allocated channels in the previous step. During the transmitting state when micro-controller 218 in the Tx gateway does not require access to the transceiver 213, the micro-controller 214 in the access point takes over and periodically reads the network and connection status from the transceiver 213 and indicates it to the user by configuring the user-indicator
35 215.

As shown in FIG. 2, the power unit 200 supplies all the access points in the entire network with power. It also powers up all the gateways that are coupled to any access point in network 100.

5

FIG. 6 shows an exemplary embodiment of the front end used in all access points in the network 100. The front end of the access point 600 according to this embodiment, comprises:

- A general purpose gateway connector 601
- 10 • An indicator 602 used for indication of available unused bandwidth in the network
- An indicator 603 used for indication of bandwidth allocation in process when a transmitter is connected to the network.
- An indicator 604 used for indication of success in bandwidth allocation when a transmitter is connected to the network.
- 15 • An indicator 605 used for indication of absence of appropriate transmitter when a receiver is connected to the network.
- An indicator 606 used for indication of failure in bandwidth allocation when a transmitter is connected to the network.
- 20 • An indicator 607 used for indication of other failures, e.g. system error.

As mentioned above the system has distributed control logic. The control logic can be implemented in both AP and GW and provide different functionality. The control logic amongst others handles (implemented in one or all APs):

- 25 • Bandwidth allocation request,
- Group connection setup ,
- Group address setting,
- Network and connection status indication and
- Terminal initiation.

30

If the control logic is provided in both GW and AP, in a Tx GW, it handles bandwidth allocation request and connection setting, while in the Rx GW it handles group address settings. Thus, the AP handles network status and connection status indication and initiation when disconnected.

35

If the control logic is provided mostly in GW, in a Tx GW, it handles bandwidth allocation request and connection setting, while in the Rx GW it handles group

Ink. t. Patent- och reg.verket

2003-01-17


14

Huvudföran Kasean

address settings. In both Rx and Tx GW, network status and connection status indication are handled, and in all APs handle initiation when disconnected.

- 5 The invention is not limited to the shown embodiments but can be varied in a number of ways without departing from the scope of the appended claims and the arrangement and the method can be implemented in various ways depending on application, functional units, needs and requirements etc. In one embodiment for example, the gateway and the access point can be implemented as one unit. It is possible to use at least partly wireless network and/or encrypt some of signals.

10



Ink t Patent- och reg.verket

2003-01-17

15

Huvudfaxen Kossan

CLAIMS

1. A multimedia network system (100) for inter-connecting a number of receiving and transmitting digital and/or analogous devices (105, 106, 107, 108R, 108L, 109, 110, 111, 112, 113L, 113R, 114, 115, 116, 117, 118, 119L, 119R, 120, 121, 122, 123, 124, 125, 126L, 126R, 210, 211, 212), the network system comprising:
 - a number of receiving and/or transmitting terminals (AP, 201, 202, 203, 204, 205, 206) to be connected to said digital and/or analogous devices,
 - application specific connector arrangements (GW, 207, 208, 1-10 Tx, 1-10 Rx) for connecting said digital and/or analogous devices to said terminals, and
 - at least one of said connector arrangements being arranged to transmit (1-10 Tx) and/or receive (1-10 Rx) data, said at least one connector arrangement containing data at least about required bandwidth, identification and receiving/transmitting device data format.
2. The network system of claim 1, wherein said connector arrangements are connected to said terminals through identical interfaces.
3. The network system of claim 1, comprising a control logic, for handling one or several of:
 - bandwidth allocation request,
 - group connection set-up,
 - group address setting,
 - network status indication,
 - connection status indication, and
 - Terminal initiation.
4. The network system of claim 3, wherein said control logic is provided in at least one of said terminals and/or at least one of said connector arrangements.
5. The network system of claim 4, wherein said control logic provided in at least one connector arrangement being a transmitting connector, handles one or several of:
 - bandwidth allocation request,
 - group connection set-up,

Ink. t. Patent- och reg.verket

2003 -01- 17

16

Huvudföreläggningen

- network status indication, and
 - connection status indication.
- 5 6. The network system of claim 4, wherein said control logic is provided in a least one connector arrangement being a receiving connector handling at least one of:
- group address setting
 - network status indication, and
 - connection status indication.
- 10 7. The network system of claims 5 and 6, wherein said terminal handles at least one of
- network status indication
 - connection status indication, and
- 15 8. The network system of claim 1, wherein a group of said connector arrangements consists of one transmitting and at least one receiving connector arrangements having same identity.
- 20 9. The network system of claim 8, wherein said identity is user and/or at least partly pre-defined by means of an identification means (219, 222).
- 25 10. The network system of claim 1, wherein the output from a connector arrangement connecting a transmitter device (210) is adapted into a digital format, supported by a source port of a network transceiver (213) in a terminal (201).
- 30 11. The network system of claim 10, wherein the adaptation is done in a transmitter adaptation (217), which is in one side connected to an output of the transmitter and in other side to a source port of the network transceiver in the terminal.
- 35 12. The network system of claim 11, wherein an adapted data, when inserted into the network, is captured in said terminals in the network using an appropriate receiver connector arrangement where it is adapted back into an original format and delivered to a receiver device.

Int. t. Patent- och reg.verket

17

2003-01-17

Huvudmann Kassen

- 5 13. The network system of claim 12, wherein the adapted data stream from a transmitter device (210) is captured in the terminal (202, 203) and adapted back in an receiver adaptation (220) in the receiver connector arrangement (208) and delivered to a receiver device (211, 212).
14. The network system of claim 1, wherein signals from several devices are transmitted simultaneously through the network.
- 10 15. The network system of claim 1, wherein each connector arrangement comprises an identification set arrangement to configure receivers to corresponding transmitters.
- 15 16. The network system of claim 1, wherein a connector arrangement comprises means to receive an analogue signal, means for converting said signal to a digital signal and means to transmit said digital signal on said network.
- 20 17. The network system of claim 1, wherein a connector arrangement comprises means to receive an digital signal from said network, means for converting said signal to an analogue signal and means to couple said analogue signal to an analogue device.
- 25 18. The network system of claim 16 or 17, wherein said analogue signal is one of audio or video signals, which can be compressed and/or encoded.
- 30 19. The network system of claim 10, wherein said identification elements comprise switches for setting unique identities for transmitting and receiving connector arrangements.
- 35 20. The network system of claim 1, wherein said connector arrangement comprises information member informing about accessibility and/or type of connection.
21. The network system according to any of preceding claims, said terminals and/or connector arrangements are identical.

Ink. t. Patent- och reg.verket

2003 -01- 17

Muvudfaxen Kaseon

18

22. The network system according to any of preceding claims, wherein a connector arrangement identifies a network capacity and characteristic before transmitting on the network.
- 5 23. The network system according to any of preceding claims, wherein said network has one of a ring or star-topology.
24. The network system according to any of preceding claims, wherein said terminals are arranged in series and/or parallel.
- 10 25. The network system according to any of preceding claims, wherein said network is implemented as one of MOSTnet or IEEE 1394.
- 15 26. The network system according to any of preceding claims, wherein said terminal and connector arrangement are integrated.
27. The network system according to any of preceding claims, wherein at said terminals and connector arrangements are powered through same source.
- 20 28. A connector arrangement for use in a network system according to any of claims 1-27 comprising:
- a controller (221),
 - a receiver and/or
 - a transmitter adapter
 - 25 • Identification means, and
 - physical connectors for connecting to said devices.
29. A terminal for use in a network system according to any of claims 1-27 comprising a controller (214) and a transceiver (213).
- 30 30. The terminal of claim 29, comprising Control Ports (CP) and source ports (SP) configured in either serial or parallel mode.
31. A method of inter-connecting a number of receiving and transmitting digital and/or analogous devices (105, 106, 107, 108R, 108L, 109, 110, 111, 112, 113L, 113R, 114, 115, 116, 117, 118, 119L, 119R, 120, 121, 122, 123, 124, 125, 126L, 126R, 210, 211, 212),
- 35

- a network system,
- a number of receiving and/or transmitting terminals (AP, 201, 202, 203, 204, 205, 206) to be connected to said digital and/or analogous devices,
- application specific connector arrangements (GW, 207, 208, 1-10 Tx, 1-10 Rx) for connecting said digital and/or analogous devices to said terminals, and

arranging at least one of said connector arrangements to transmit (1-10 Tx) and/or receive (1-10 Rx) data, wherein at least one connector arrangement contains data at least about required bandwidth, identification and receiving/transmitting device data format.

Ink. t. Patent- och reg.verket

2003-01-17

Huvudfaxen Kassar


20

ABSTRACT

The present invention relates to a multimedia network system (100) for inter-
connecting a number of receiving and transmitting digital and/or analogous devices
5 (105, 106, 107, 108R, 108L, 109, 110, 111, 112, 113L, 113R, 114, 115, 116, 117,
118, 119L, 119R, 120, 121, 122, 123, 124, 125, 126L, 126R, 210, 211, 212). The
network system comprises: a number of receiving and/or transmitting terminals
(AP, 201, 202, 203, 204, 205, 206) to be connected to said digital and/or
analogous devices, application specific connector arrangements (GW, 207, 208, 1-
10 10 Tx, 1-10 Rx) for connecting said digital and/or analogous devices to said
terminals. At least one of said connector arrangements being arranged to transmit
(1-10 Tx) and/or receive (1-10 Rx) data. The at least one connector arrangement
containing data at least about required bandwidth, identification and
receiving/transmitting device data format.

15

(Fig. 1)



1/6

FIG. 1

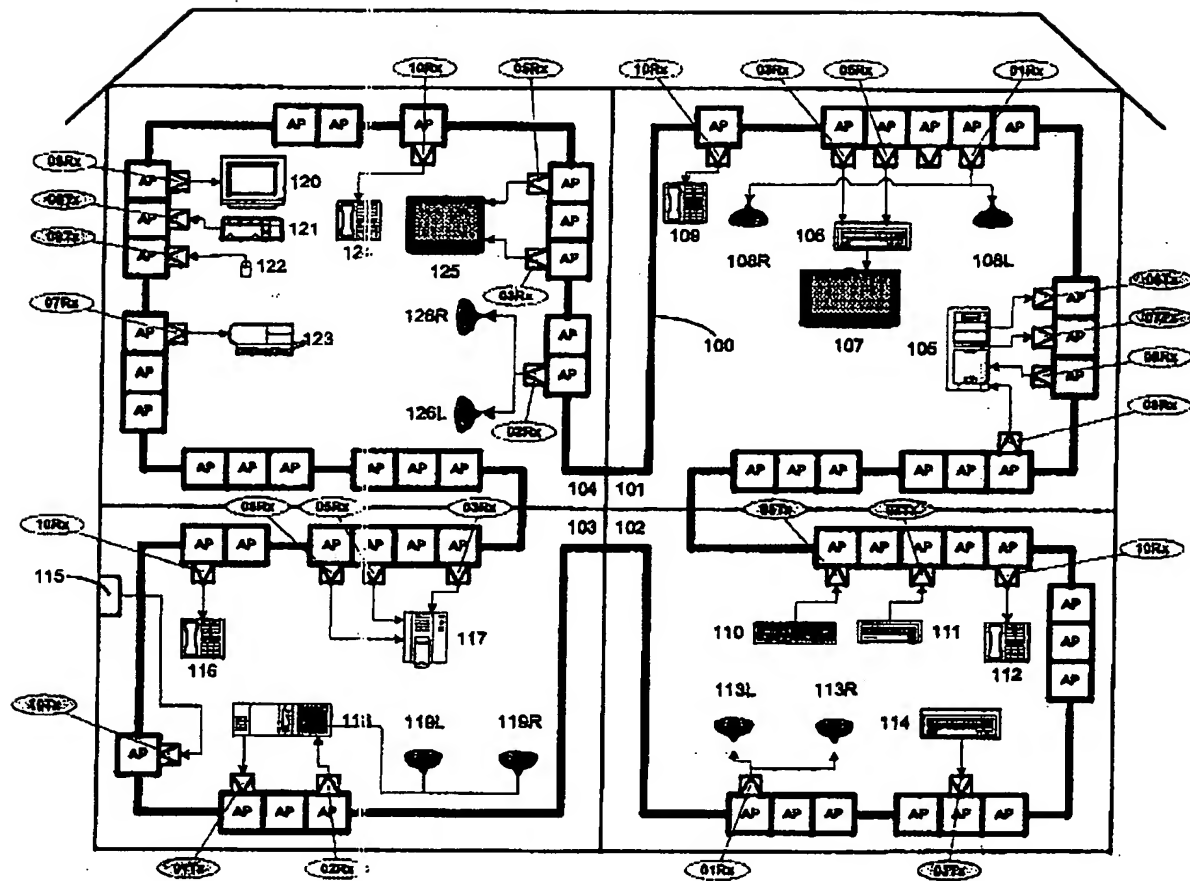


FIG. 2


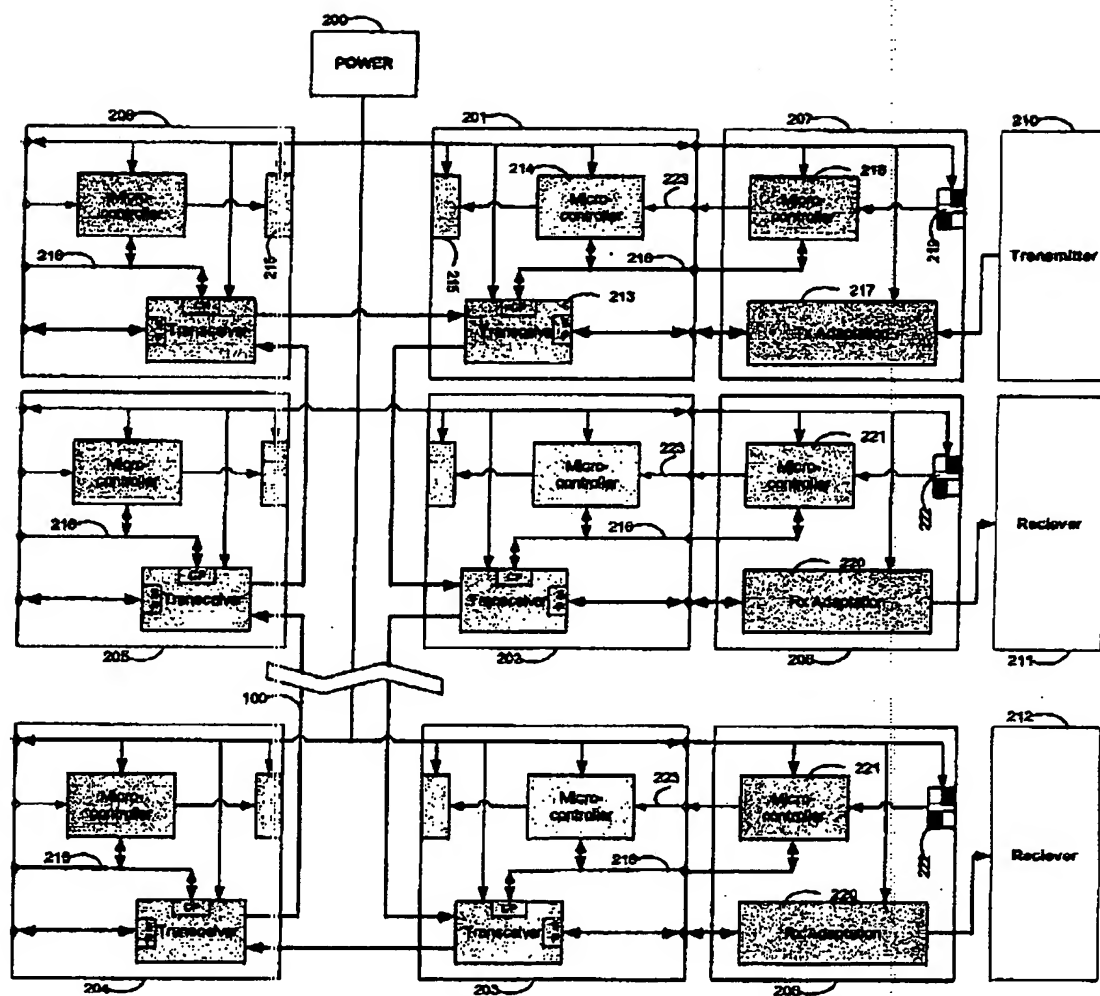


FIG. 3

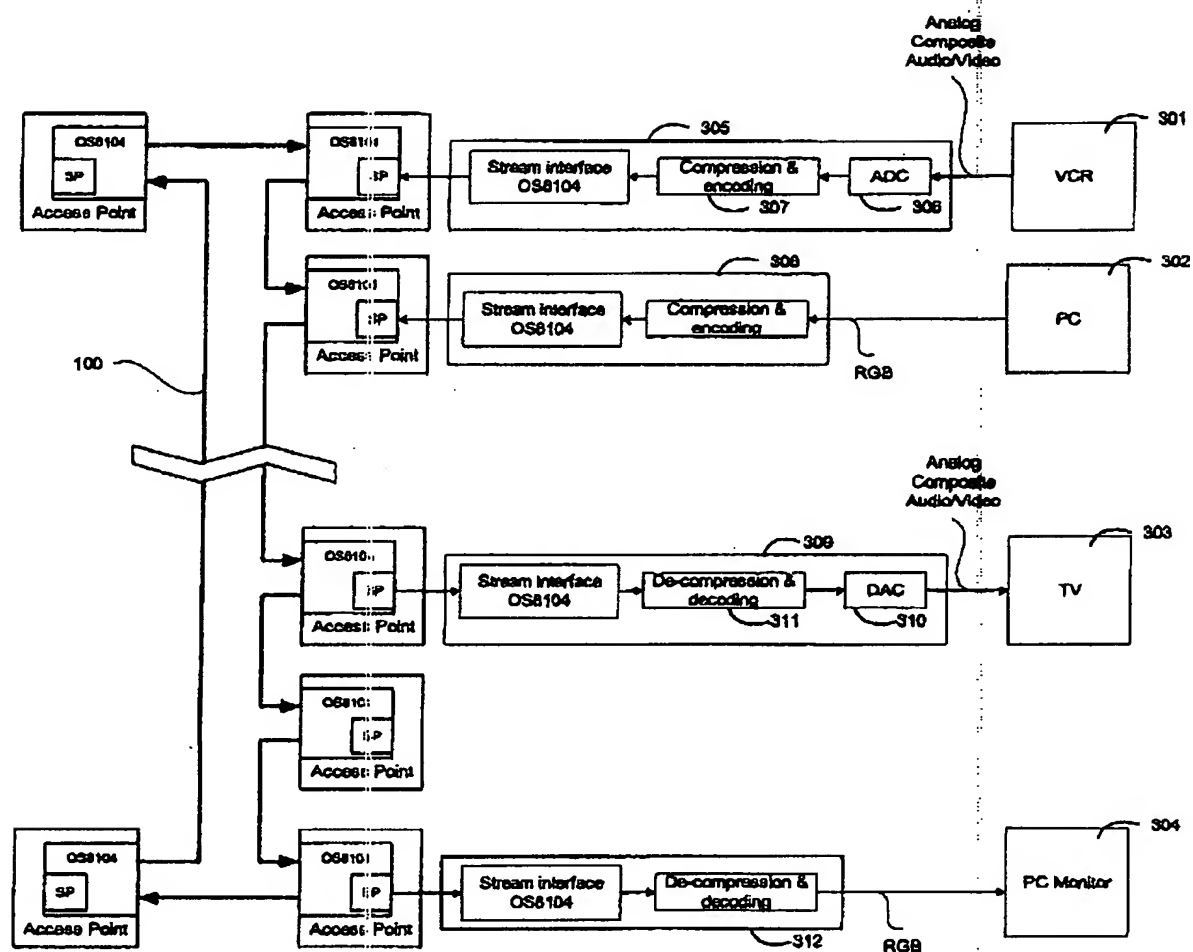


4/6

Ink. t. Patent- och reg.verket

2003 -01- 17

Huvudfaxen Kasse

FIG. 4

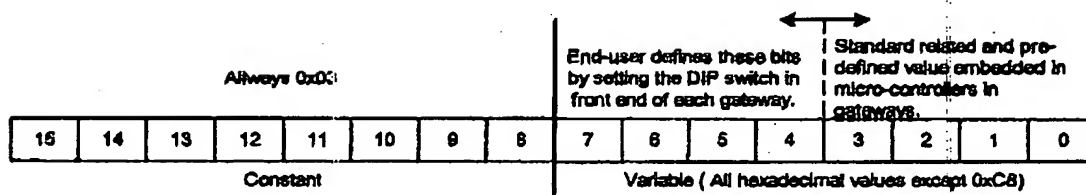


5/6

Ink. t. Patent- och reg.verket

2003-01-17

Huvudfaxen Kassa

FIG. 5

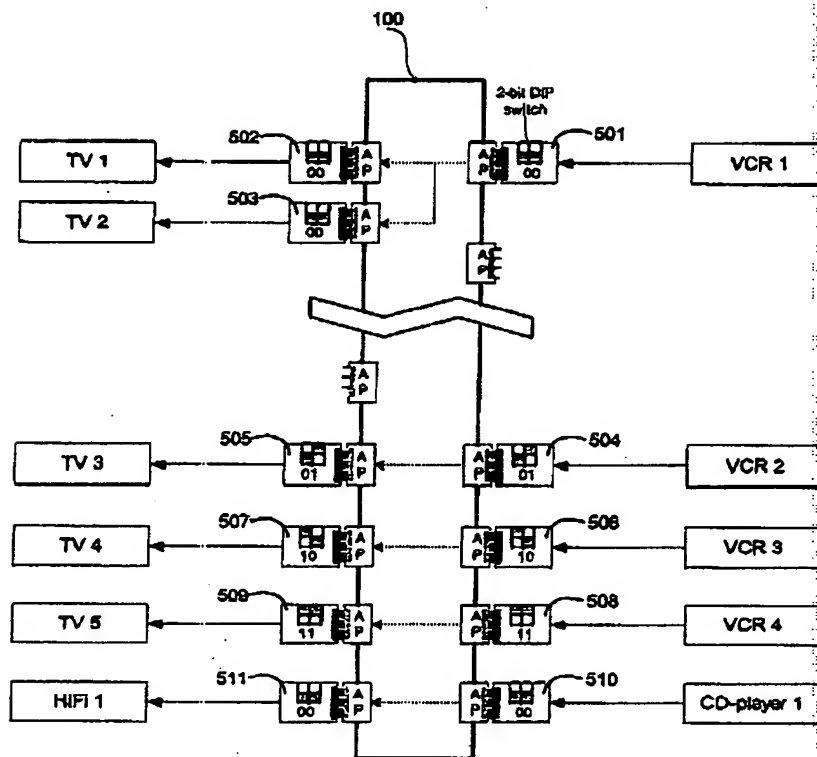

6/6

Ink. t. Patent- och reg.verket

2003 -01- 17

Huvudfaxen Kassan

FIG. 6

